



Introduction

The XO Tank is **leak free**, has **child locking safety features** and the **dual lines design** keeps the tank cool and the vapour production plentiful.



Structure



Features

- Stainless Steel and Pyrex Construction
- 510 Connection
- Child Lock Top and Bottom
- Easy Top Fill
- Compatible with;
 - XO 0.5Ohm SS Coil (Stainless Steel) (*Direct Lung*)
 - XO 1.8Ohm Kanthal Coil (*Mouth-to-Lung*)
 - XO 0.2 Ni200 Coil (*Temperature Control*)

Contents;

- 1 x XO Tank (2ml)
- 2 x Coils (See each coil for resistance)
- 1 x Replacement Glass
- 1 x Set Replacement O-Rings



Child-Lock

The XO Tank features innovative child-lock technology sealing the tank from the top and bottom when full. To release the top and bottom cap, firstly press down and unscrew the top cap and remove, once removed grasp the internal section and unscrew the bottom cap. Once the bottom cap is removed the outer glass tube can slide down and be replaced.



How to Top Fill




To fill your XO Tank, firstly push down and screw off the child lock top cap and place to one side. Once removed place the nozzle of your e-liquid bottle directly into one of the two filling ports in the top of the device. Be careful not to insert the nozzle into the centre shaft.



Fill the tank with e-liquid to the top. Use the glass as an indicator. Ensure the unused fill port is free from obstruction as this releases air during filling.

Once full please allow 3 minutes before vaping.

Exchange the Coil Head

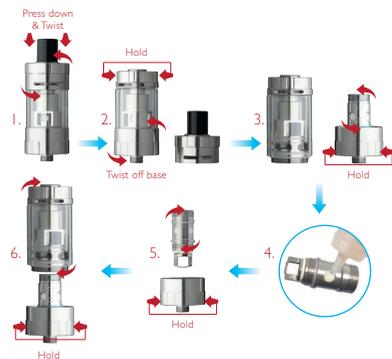

1. Screw off the child-lock top cap
2. Hold internal section and screw off base
3. Screw out and discard old coil head
4. Prime coil head with 2-3 drops of e-liquid
5. Screw in new, primed coil head
6. Re-attach tank section to base
7. Fill tank via top filling port, attach top cap and enjoy



XO atomizer heads and accessories are designed and manufactured with a high consumer focus. Utilising advanced methods of manufacturing and material selection, these XO atomizer heads deliver a consistent vape every time.

CAUTION

1. These coils utilise organic cotton wick, please do not activate without the presence of e-liquid.
2. It is recommended to saturate the coil prior to vaping, please allow 3 minutes for coil to saturate before firing.

XO Coils

The XO Tank comes with 2 atomizer heads please find below the various heads that fit the XO Tank.

0.5Ohm SS (Stainless Steel) - Perfect for temperature control (SS Mode) vaping or higher wattages and **direct lung inhales**.

1.8Ohm Kanthal - Tighter airflow draw through the coil. Perfect for **mouth to lung inhales**. (Not temperature mode compatible)

0.2Ohm Ni200 - Perfect for temperature control (Ni Mode) vaping and **direct lung inhales**. (Please note these coils only work in XO Dynamic and XO Cloudchaser kits and other temperature control devices)



Cleaning & Maintaining

When necessary clean the components (except the coil head) by washing with clean water and air drying the components.

The glass tank should not be impacted, dropped, or mishandled. Doing so could damage the glass tube and injury may occur.

Warning

This product is not intended for use by any one under the age of 18. Do not operate or heat the coil outside of its designed container. Doing so may cause serious injury as the coil can reach high temperatures. Seek medical advice if you feel unwell or are pregnant. Not recommended for young people or non-smokers. There are no recorded medical side effects for this product.

Bypass mode should only be used by advanced users with a good understanding of Ohm's law and battery cell safety. Failure to do this may result in thermal runaway or serious injury. All usual time and voltage protections still apply.

Liberty Flights is not liable for any malfunction of any mods or battery, injury or death related to use of separate batteries and mods made by other manufacturers. Do not operate in the rain. Do not expose it to water when attached to a battery device.

To learn more about our products and vaping contact:

www.liberty-flights.co.uk

8-9 Arkwright Court, Darwen,
Lancashire, BB3 0FG

Tel. 0345 257 9008